


56CV320-GY

56 Series Switched Socket Outlet - 20A - 3 Pin - 1 Pole Switch - 250V - Grey

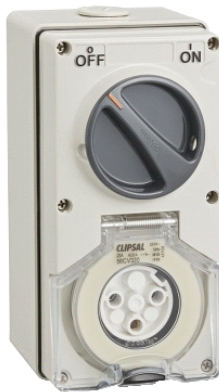

Main

| | |
|---------------------------|---------------------|
| Range of product | Series 56 |
| Range | Clipsal - 56 Series |
| Product brand | Clipsal |
| Product or component type | Socket-outlet |
| Device application | Power supply |
| Colour | Grey RAL 7035 |

Complementary

| | |
|-------------------------------------|--|
| Number of poles | 3 |
| Plug, socket category | Low voltage |
| Outlet standard | Australian/New Zealand |
| Plug, socket, control station shape | Straight |
| Number of modules | 1 |
| Number of power socket outlets | 1 protective cover |
| [In] rated current | 20 A |
| [Ue] rated operational voltage | 250 V AC 50 Hz |
| Poles description | 1P + N + E |
| Protection type | Without protection |
| Device mounting | Surface |
| Material | Polycarbonate for the cover |
| Contacts material | Phosphor bronze for the pins |
| Connections - terminals | Screw terminals 2.5...16 mm ² |
| Electrical connection | Industrial connector |
| Depth | 108 mm |
| Width | 101 mm |
| Height | 204 mm |
| Targeted country | Australia |

Environment

| | |
|---------------------------------------|-----------------------------|
| standards | AS/NZS 3123 AS/NZS 3133 |
| ambient air temperature for operation | -25...75 °C |
| IP degree of protection | IP66 conforming to AS 60529 |

Offer Sustainability

| | |
|----------------------------------|---|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1650 - Schneider Electric declaration of conformity |
| REACH | Reference contains SVHC above the threshold |
| Product environmental profile | Available |
| Product end of life instructions | Need no specific recycling operations |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.