


# ATS01N212QN

soft starter for asynchronous motor - ATS01 - 12 A - 380..415V - 5.5 KW

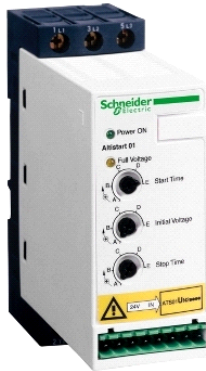

## Main

Range of product	Altistart 01
Product or component type	Soft starter
Product destination	Asynchronous motors
Product specific application	Simple machine
Device short name	ATS01
Network number of phases	3 phases
[Us] rated supply voltage	380...415 V - 10...10 %
Motor power kW	5.5 kW 3 phases 380...415 V
IcL starter rating	12 A
Utilisation category	AC-53B EN/IEC 60947-4-2
Current consumption	60 A at nominal load
Type of start	Start with voltage ramp
Power dissipation in W	124 W in transient state 4 W at full load and at end of starting

## Complementary

Assembly style	With heat sink
Function available	Integrated bypass
Supply voltage limits	342...456 V
Supply frequency	50...60 Hz - 5...5 %
Network frequency	47.5...63 Hz
Output voltage	<= power supply voltage
[Uc] control circuit voltage	Built into the starter
Starting time	Adjustable from 1 to 10 s
Deceleration time symb	Adjustable from 1 to 10 s
Starting torque	30...80 % of starting torque of motor connected directly on the line supply
Discrete input type	Logic LI1, LI2, BOOST stop, run and boost on start-up functions <= 8 mA 27 kOhm
Discrete input voltage	24...40 V
Discrete input logic	Positive LI1, LI2, BOOST < 5 V and <= 0.2 mA > 13 V >= 0.5 mA
Discrete output current	2 A DC-13 3 A AC-15
Discrete output type	Open collector logic LO1 end of starting signal Relay outputs R1A, R1C NO
Discrete output voltage	24 V 6...30 V open collector logic
Minimum switching current	10 mA 6 V DC relay outputs
Maximum switching current	2 A 250 V AC inductive cos phi = 0.5 20 ms relay outputs 2 A 30 V DC inductive cos phi = 0.5 20 ms relay outputs
Display type	1 LED green starter powered up 1 LED yellow nominal voltage reached
Tightening torque	0.5 N.m 1.9...2.5 N.m
Electrical connection	4 mm screw clamp terminal rigid 1 1...10 mm <sup>2</sup> AWG 8 power circuit Screw connector rigid 1 0.5...2.5 mm <sup>2</sup> AWG 14 control circuit 4 mm screw clamp terminal rigid 2 1...6 mm <sup>2</sup> AWG 10 power circuit Screw connector rigid 2 0.5...1 mm <sup>2</sup> AWG 17 control circuit Screw connector flexible with cable end 1 0.5...1.5 mm <sup>2</sup> AWG 16 control circuit 4 mm screw clamp terminal flexible without cable end 1 1.5...10 mm <sup>2</sup> AWG 8 power circuit Screw connector flexible without cable end 1 0.5...2.5 mm <sup>2</sup> AWG 14 control circuit 4 mm screw clamp terminal flexible with cable end 2 1...6 mm <sup>2</sup> AWG 10 power circuit 4 mm screw clamp terminal flexible without cable end 2 1.5...6 mm <sup>2</sup> AWG 10 power circuit

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Screw connector flexible without cable end 2 0.5...1.5 mm<sup>2</sup> AWG 16 control circuit


Marking	CE
Operating position	Vertical +/- 10 degree
Height	124 mm
Width	45 mm
Depth	131 mm
Product weight	0.42 kg
Compatibility code	ATS01N2
Power range	4...6 kW at 380...440 V 3 phases
Motor starter type	Soft starter

## Environment


electromagnetic compatibility	<p>EMC immunity EN 50082-1  Damped oscillating waves level 3 IEC 61000-4-12  Electrostatic discharge level 3 IEC 61000-4-2  Immunity to electrical transients level 4 IEC 61000-4-4  Immunity to radiated radio-electrical interference level 3 IEC 61000-4-3  Voltage/current impulse level 3 IEC 61000-4-5  Conducted and radiated emissions level B CISPR 11  Conducted and radiated emissions level B IEC 60947-4-2  EMC immunity EN 50082-2  Harmonics IEC 1000-3-2  Harmonics IEC 1000-3-4  Immunity to conducted interference caused by radio-electrical fields level 3 IEC 61000-4-6  Micro-cuts and voltage fluctuation IEC 61000-4-11</p>
standards	EN/IEC 60947-4-2
product certifications	<p>B44.1-96/ASME A17.5 for starter wired to the motor delta terminal  CCC  CSA  C-Tick  GOST  UL</p>
IP degree of protection	IP20
pollution degree	2 EN/IEC 60947-4-2
vibration resistance	<p>1.5 mm peak to peak 3...13 Hz EN/IEC 60068-2-6  1 gn 13...150 Hz EN/IEC 60068-2-6</p>
shock resistance	15 gn 11 ms EN/IEC 60068-2-27
relative humidity	5...95 % without condensation or dripping water EN/IEC 60068-2-3
ambient air temperature for operation	<p>-10...40 °C without derating  40...50 °C with current derating of 2 % per °C</p>
ambient air temperature for storage	-25...70 °C EN/IEC 60947-4-2
operating altitude	<p>&lt;= 1000 m without derating  &gt; 1000 m with current derating of 2.2 % per additional 100 m</p>

## Dimensions

### Mounting on Symetrical (35 mm) Rail

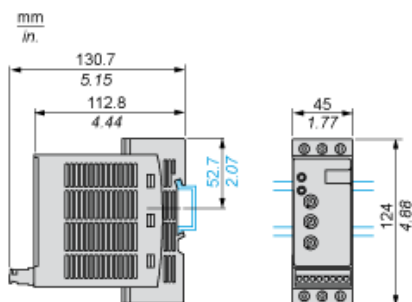


### Screw Fixing

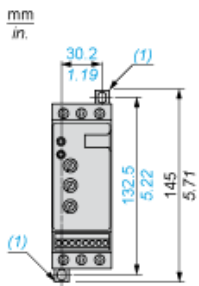

(1) Retractable fixings


### Example of Manual Control

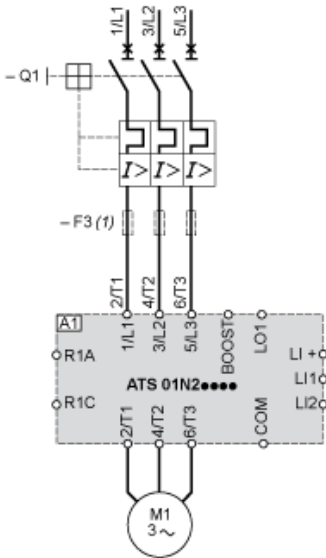

- A1 : Soft start/soft stop unit
- (1) For type 2 coordination
- Q1 : Motor circuit-breaker
- F3 : 3 fast-acting fuses


### Function Diagram

#### 2-wire Control with Deceleration

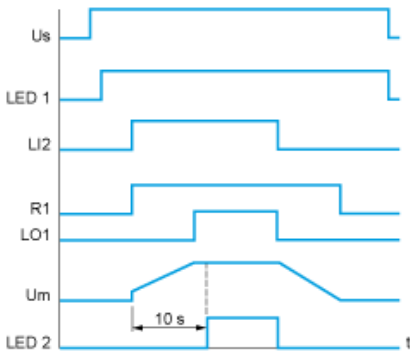

- Us : Power supply voltage
- LED Green LED
- 1 :
- LI2 : Logic input
- R1 : Relay output
- LO1 : Logic output
- LED Yellow LED
- 2 :

#### 3-wire Control with Deceleration

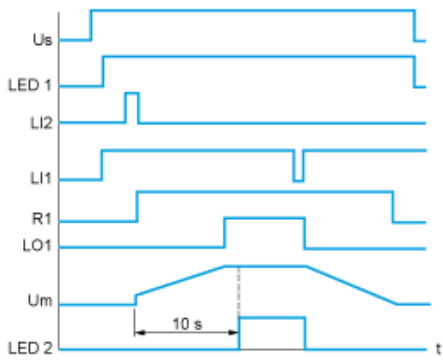

**Us** : Power supply voltage

**LED Green LED**

**1 :**

**LI2,** Logic inputs

**LI1 :**

**R1** : Relay output

**LO1** :Logic output

**Um** :Motor voltage

**LED Yellow LED**

**2 :**