


GV2G245

Lineryy FT - Comb busbar - 63 A - 2 tap-offs - 45 mm pitch

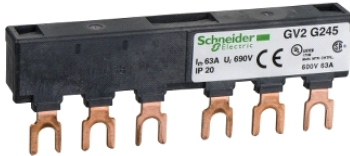

Main

Range	Lineryy
Product name	FT
Device short name	GV2G
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys - GV2 TeSys - U TeSys - D TeSys - K
Number of tap-offs	2
[I _{th}] conventional free air thermal current	63 A
Connection pitch	45 mm

Complementary


Mounting location	On terminal
[Ui] rated insulation voltage	690 V
Length	89 mm
Product weight	0.036 kg

Environment


Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0640 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

Sets of Busbars GV2G... with Terminal Block GV1G09



Sets of Busbars GV2G245, GV2G254, GV2GR272



The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

	I
GV2G245 (2 x 45 mm)	89
GV2G254 (2 x 54 mm)	98
GV2G272 (2 x 72 mm)	116