


## CH25723

Acti 9 - MSC 18/27 hybrid Chassis - for iC60 - 3PH - 250A - 72P

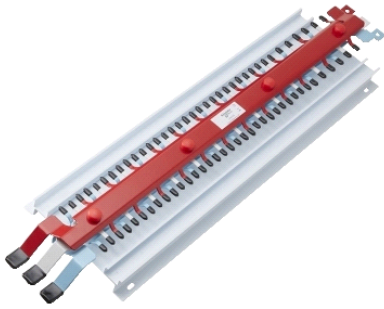

### Main

|                           |              |
|---------------------------|--------------|
| Range                     | Acti 9       |
| Device short name         | MSC 18/27    |
| Product or component type | Chassis      |
| Device application        | Distribution |

### Complementary

|  |  |
|--|--|
| Range compatibility                      | Acti 9 Isobar B distribution board                                 |
| [In] rated current                       | 250 A  |
| Short-circuit withstand                  | 25 kA for 0.1 s  |
| [Icw] rated short-time withstand current | 25 kA  |
| Number of ways                           | 72 as outgoer<br>72 as outgoer<br>1 way as incomer - 3P            |
| Number of poles                          | 12 nos. for 27 mm pole capacity<br>60 nos. for 18 mm pole capacity |
| Length                                   | 704 mm   |
| Width                                    | 215 mm   |

### Environment

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.